

641-6035

ORIGINAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

SUBDIVISION OF SECTION 35,
TOWNSHIP 25 NORTH, RANGE 85 WEST,
OF THE SIXTH PRINCIPAL MERIDIAN,
IN THE STATE OF WYOMING

EXECUTED BY

LYNN A. FORBES

CADASTRAL SURVEYOR

Under Special Instructions dated SEPTEMBER 1, 1999, approved SEPTEMBER 1, 1999, which provided for the surveys included under Group Number 669, and assignment instructions dated SEPTEMBER 1, 1999.

Survey commenced SEPTEMBER 29, 1999

Survey completed SEPTEMBER 30, 1999

641-6035

INDEX DIAGRAM

Township 25 North, Range 85 West

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

T. 25 N., R. 85 W., Sixth Principal Meridian, Wyoming

CHAINS

The following field notes are those of the subdivision of section 35, Township 25 North, Range 85 West, Sixth Principal Meridian, Wyoming.

Mortimer N. Grant surveyed the Sixth Standard Parallel North(south boundary) and the subdivisional lines in 1881. Mark D. King dependently resurveyed the south boundary in 1938. William H. Herbst dependently resurveyed the subdivisional lines in 1979.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 669, Wyoming, dated September 1, 1999.

Preliminary to the resurvey, the lines of the previous surveys were retraced and diligent search was made for all corners and other calls of the field note record. Identified corners were remonumented in their original positions; lost corners were reestablished and monumented at proportionate positions based on the latest official record, but only after exhausting every possibility of finding direct evidence of such corners. The survey data was thoroughly verified and only true line field notes are given herein, which refer to the completed survey.

The survey was executed with a Global Positioning System (GPS) TRIMBLE Model 4000SSI receiver. The instruments were maintained in proper adjustment at all times. The direction of all lines refer to the true meridian. All directions, distances and geographic position were determined by Global Position System method.

The geographic position of the standard 1/4 sec. cor. of sec 35, based on NAD 83 and determined by Global Positioning methods, is:

Latitude 42° 05' 13.18" N., Longitude 106° 58' 09.61" W.

The magnetic declination is 13° E.

Subdivision of Section 35,
T. 25 N., R. 85 W., Sixth Principal Meridian, Wyoming

Beginning at the standard 1/4 sec. cor. of sec. 35 on the S. bdy. of the Tp., monumented with an iron post, 1 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd.

Subdivision of Section 35,
T. 25 N., R. 85 W., Sixth Principal Meridian, Wyoming

CHAINS	<div style="text-align: center;"> S C $\frac{1}{4}$ S 35 <hr/> 1938 </div> <p>N. 0° 26' E., on the N. and S. center line of sec. 35.</p> <p>Over rolling terrain.</p>
20.14	<p>Point for the center S. 1/16 sec. cor. of sec. 35.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> T25N R85W C S1/16 S 35 C 1999 </div>
37.40	<p>Set a steel fence post alongside the iron post.</p> <p>Trail road, bears SW. and NE.</p>
40.28	<p>Point for the center ¼ sec. cor. of sec. 35, at intersection with the E. and W. center line.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> T25N R85W C1/4 S 35 1999 </div>
80.11	<p>Set a steel fence post alongside the iron post.</p> <p>The ¼ sec. cor. of secs. 26 and 35, monumented with an iron post, 2½ ins. diam., firmly set, projecting 2 ins. above the ground, with steel fence post alongside, with brass cap mkd.</p> <div style="text-align: center;"> T25N R85W S 26 $\frac{1}{4}$ — S 35 1979 </div> <hr/> <p>From the ¼ sec. cor. of secs. 35 and 36, monumented with an iron post, 2½ ins. diam., firmly set, projecting 4 ins. above the ground, with steel fence post alongside, with brass cap mkd.</p>

Subdivision of Section 35,
T. 25 N., R. 85 W., Sixth Principal Meridian, Wyoming

CHAINS	<p style="text-align: center;">T25N R85W 1/4 S 35 S 36 1979</p> <p>N. 89° 52' W., on the E. and W. center line of sec. 35.</p> <p>Over rolling terrain.</p> <p>2.60 Fence, bears N. and S.</p> <p>36.30 Trail road, bears SW. and NE.</p> <p>39.72 The center ¼ sec. cor. of sec. 35.</p> <p>59.52 Point for the center W. 1/16 sec. cor. of sec. 35.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T25N R85W W1/16 C — C S 35 1999</p> <p>Set a steel fence post alongside the iron post.</p> <p>79.32 The ¼ sec. cor. of secs. 34 and 35, monumented by with an iron post, 2½ ins. diam., firmly set, projecting 10 ins. above the ground, with a steel fence post alongside, with brass cap mkd.</p> <p style="text-align: center;">T25N R85W 1/4 S 34 S 35 1979</p> <hr/> <p>From the standard W. 1/16 sec. cor. of sec. 35, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set, projecting 4 ins. above the ground, with a steel fence post alongside, with brass cap mkd.</p> <p style="text-align: center;">S C T25N R85W W1/16 S 35 <hr/>1979</p>
--------	---

Subdivision of Section 35,
T. 25 N., R. 85 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>N. 0° 39' E., on the N. and S. center line of the SW$\frac{1}{4}$ of sec. 35.</p> <p>Over rolling terrain.</p>
20.12	<p>Point for the SW. 1/16 sec. cor. of sec. 35, at intersection with the E. and W. center line of the SW$\frac{1}{4}$.</p> <p>Set an iron post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T25N R85W</p> <p style="text-align: center;">SW 1/16 S 35</p> <p style="text-align: center;">1999</p> <p>Set a steel fence post alongside the iron post.</p>
27.70	Trail road, bears SW. and NE.
40.24	The center W. 1/16 sec. cor. of sec. 35.
	<hr/> <p>From the center S. 1/16 sec. cor. of sec. 35.</p> <p>N. 89° 48' W., on the E. and W. center line of the SW$\frac{1}{4}$ of sec. 35.</p> <p>Over rolling terrain.</p>
19.88	The SW. 1/16 sec. cor. of sec. 35.
39.76	The S. 1/16 sec. cor. of secs. 34 and 35.
	<hr/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The area embraced by this survey is located in the north central portion of Carbon County, approximately 27 miles north-northeast of Sinclair, Wyoming. The terrain is rolling with an average elevation of about 6,700 feet above sea level. The soil is sandy loam with vegetation consisting of native grasses and sagebrush.</p> <p>Drainage of the area is easterly by numerous draws in the area.</p> <p>Access is provided by the Seminoe Road from Sinclair Wyoming and by numerous other roads and trails in the area. The area is uninhabited and there was no evidence of mineral activity at the time of the survey.</p>

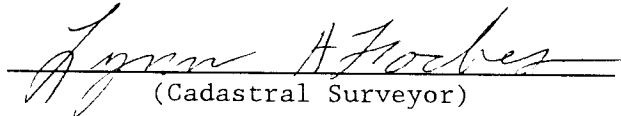
[illegible]

CERTIFICATE OF SURVEY

I, Lynn A. Forbes, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 1st day of September, 1999, have subdivided section 35, Township 25 North, Range 85 West, of the Sixth Principal Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

SEP 22 2000

(Date)


(Cadastral Surveyor)

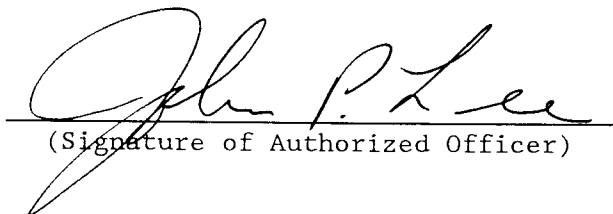
CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Cheyenne, Wyoming

The foregoing field notes of the subdivision of section 35, Township 25 North, Range 85 West, of the Sixth Principal Meridian, in the State of Wyoming, executed by Lynn A. Forbes, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

SEP 22 2000

(Date)


(Signature of Authorized Officer)